

Instruction Sheet

RMS/RMS-TNC

Order No. 71081-001

Order No. 71081-004

PN 804075 Rev. B

General Description

The RMS and RMS-TNC is a 19 inch single rack mount adaptor kit for Telex and Electro-Voice half rack wide receivers and transmitters. The RMS-TNC kit contains cable and connector assemblies that allow antennas or antenna cables to be mounted on the front of the rack installation.

Assembly Instructions:

1. Remove the front cover screws (1) from both sides of the unit. See Figure 1.
2. Align the rack mount with the holes on the side of the unit and reinstall the screw previously removed. Install a second screw (2) from the kit (either a No. 4 or No. 6) in the rear, upper hole of the rack. The rack mount brackets may be installed on either side of the unit to offset it left or right. Tighten all screws securely.

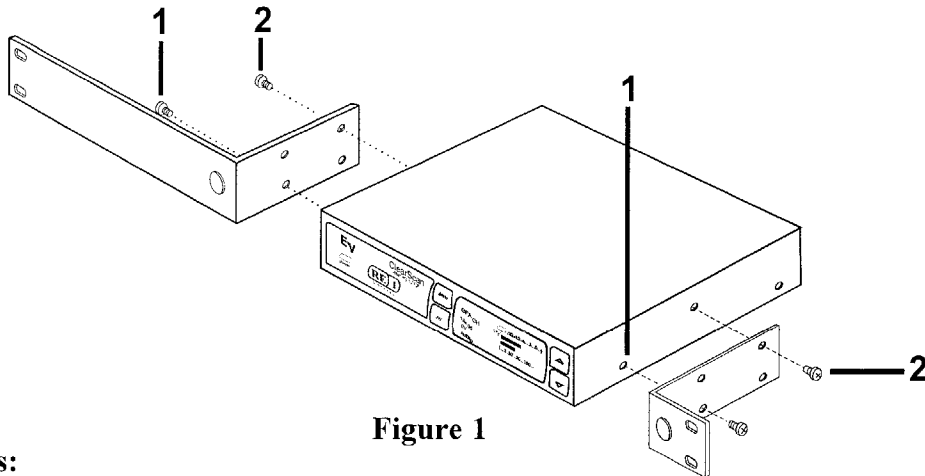


Figure 1

Attaching Cables:

1. Remove the plastic hole plugs (3) from the rack brackets. See Figure 2.
2. Remove the nut and lockwasher from the jack end (4) of the cable assembly.
3. Install the connector through the back of the bracket and reinstall the nut and lockwasher. Tighten securely.
4. Attach the plug end of the cable assembly to the radio. Tighten securely.

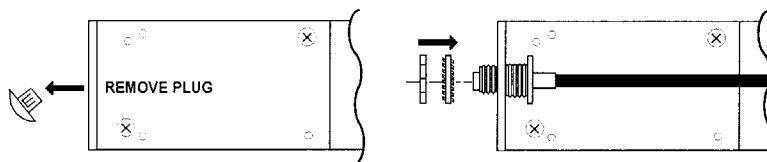


Figure 2

Installing Antennas:

1. If antennas are to be installed on the rack mounted connectors, set them as shown in Figure 3.
2. A radio with front mounted antennas should be installed as high as possible on the rack to insure the best reception or transmission.

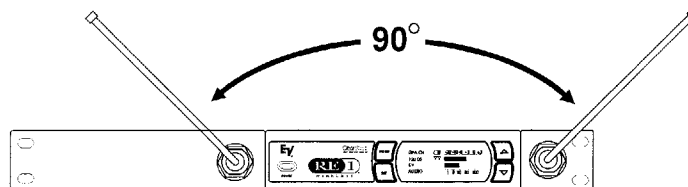


Figure 3